

UTILITY PATENT APPLICATION TRANSMITTAL

Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

1272.7623 Div. I

First Named Inventor or Application Identifier

Hiroshi Yoshino

Express Mail Label No.

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☒ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)

2. ☐ Applicant claims small entity status.
See 37 CFR 1.27.

3. ☒ Specification Total Pages

4. ☒ Drawing(s) (35 USC 113) Total Sheets

5. ☒ Oath or Declaration Total Pages

a. ☐ Newly executed (original or copy)

b. ☒ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)

i. ☐ **DELETION OF INVENTOR(S)**
Signed Statement attached deleting inventor(s)
named in the prior application, see 37 CFR
1.63(d)(2) and 1.33(b).

6. ☒ Application Data Sheet. See 37 CFR 1.76

7. ☐ CD-ROM or CD-R in duplicate, large table or Computer
Program (Appendix)

8. ☐ Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)

a. ☐ Computer Readable Form (CRF)

b. Specification Sequence Listing on:

i. ☐ CD-ROM or CD-R (2 copies); or

ii. ☐ paper

c. ☐ Statements verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

9. ☐ Assignment Papers (cover sheet & document(s))

10. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) ☐ Power of Attorney

11. ☐ English Translation Document (if applicable)

12. ☒ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations

13. ☒ Preliminary Amendment

14. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)

15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)

16. ☒ Other: Claim To Priority

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☒ Divisional ☐ Continuation-in-part (CIP) of prior application No. 08 / 522,917
Prior application information: Examiner: M. Nahiemi Group/Art Unit: 2861

For CONTINUATION OR DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 5b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

18. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label

05514

(Insert Customer No. or Attach bar code label here)

or ☐ Correspondence address below

NAME

Address

City

Country

State

Telephone

Zip Code

Fax



CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
TOTAL CLAIMS (37 CFR 1.16(c))		10-20 =	0	X \$ 18.00 =	\$ 0
INDEPENDENT CLAIMS (37 CFR 1.16(b))		1-3 =	0	X \$ 80.00 =	\$ 0
MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))				\$270.00 =	\$270.00
				BASIC FEE (37 CFR 1.16(a))	\$710.00
Total of above Calculations =					\$980.00
Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).					
TOTAL =					\$980.00

19. Small entity status

- a. ☐ A small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.


20. ☒ A check in the amount of \$ 980.00 to cover the filing fee is enclosed.

21. ☐ A check in the amount of \$ _____ to cover the recordal fee is enclosed.

22. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☒ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED

NAME	Dennis A. Duchene, Reg. No. 40,595
SIGNATURE	
DATE	October 30, 2000

INVENTOR INFORMATION

Inventor One Given Name:: HIROSHI
Family Name:: YOSHINO
Postal Address Line One:: 5-8-1,Rokkakubashi, Kanagawa-ku
Postal Address Line Two:: Yokohama-shi, Japan
City:: Yokohama
State or Province:: Kanagawa
Country:: Japan
Country of Residence:: Japan
Citizenship Country:: Japan

CORRESPONDENCE INFORMATION

Correspondence Customer Number:: 05514
Fax:: (212) 218-2200

APPLICATION INFORMATION

Title Line One:: INK JET APPARATUS AND WASTE LIQUID ABSORBING
Title Line Two:: METHOD

Total Drawing Sheets:: 8
Formal Drawings?: Yes
Application Type:: Utility
Docket Number:: 1272.7623 DI
Secrecy Order in Parent Appl.?: No

REPRESENTATIVE INFORMATION

Representative Customer Number:: 05514

PRIOR FOREIGN APPLICATIONS

Foreign Application One:: 210218/94
Filing Date:: October 2, 1994
Country:: Japan
Priority Claimed:: Yes

1272.7623 Div.I

PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Divisional Application of)

Application No. 08/522,917

HIROSHI YOSHINO

Application No.: N/Y/A

Filed: Herewith

For: INK JET APPARATUS AND
WASTE LIQUID ABSORBING
METHOD

) Prior Examiner: M. Nghiem

) Group Art Unit: 2861

) October 30, 2000

Commissioner for Patents
Washington, D.C. 20231

PRELIMINARY AMENDMENT
AND
INFORMATION DISCLOSURE STATEMENT

Sir:

Prior to examination, please amend the above-
identified application as follows:

IN THE SPECIFICATION:

Page 16, line 3, please change "ejection head" to
--ejection head 2a--.

JC927 U.S. PRO
09/699387
10/31/00

IN THE CLAIMS:

Please cancel Claims 1 to 7.

Please add new Claims 8 to 12, as follows:

--8. An ink jet apparatus for printing on a printing medium with ink and treatment liquid having a function of setting ink, said apparatus comprising:

an ink ejection port for ejecting ink;

a treatment liquid ejection port for ejecting treatment liquid;

a waste liquid accommodating substance for accommodating waste liquid;

a first introducing means for introducing waste ink discharged by recovery operation from said ink ejection port into a first portion of said waste liquid accommodating substance; and

a second introducing means for introducing waste treatment liquid discharged by recovery operation from said treatment liquid ejection port into a second portion separated from said first portion of said waste liquid accommodating substance.

9. An ink jet apparatus as claimed in Claim 8, wherein said waste liquid accommodating substance is formed in a U-shaped configuration.

10. An ink jet apparatus as claimed in Claim 8 or Claim 9, wherein said treatment liquid contains a cationic material composed of a low molecular weight ingredient and a high molecular weight ingredient, and said ink contains an anionic dye.

11. An ink jet apparatus as claimed in Claim 8 or Claim 9, wherein said treatment liquid contains a cationic material composed of a low molecular weight ingredient and a high molecular weight ingredient, and said ink contains an anionic dye or at least an anionic compound and a pigment.

12. An ink jet apparatus as claimed in any one of Claims 8 to 11, further comprising an ink jet head which includes, as an energy generating element, an electrothermal transducer for generating thermal energy so as to allow a phenomenon of film boiling to appear in ink.--

REMARKS

Favorable review and early passage to issue are respectfully requested.

INFORMATION DISCLOSURE STATEMENT

Pursuant to 37 C.F.R. § 1.56, Applicant respectfully directs the Examiner's attention to the

documents listed below and on attached Form PTO-1449.

U.S. Patent No. 4,437,104
U.S. Patent No. 4,506,277
U.S. Patent No. 4,538,160
U.S. Patent No. 4,901,094
U.S. Patent No. 4,965,596
U.S. Patent No. 5,155,497
U.S. Patent No. 5,157,421
U.S. Patent No. 5,237,341
U.S. Patent No. 5,396,271
U.S. Patent No. 5,555,008
U.S. Patent No. 5,606,354
U.S. Patent No. 5,608,432
U.S. Patent No. 5,617,124
U.S. Patent No. 5,618,338
U.S. Patent No. 5,625,385
U.S. Patent No. 5,635,969
U.S. Patent No. 5,640,187
U.S. Patent No. 5,680,162

EP 0323262
EP 0581135
EP 0585923

JP 01-063185
JP 01-184146
JP 57-022065
JP 61-244457

The above documents were cited in parent Application No. 08/522,917, and might be deemed pertinent for the reasons given there. The Examiner is respectfully directed to Patent and Trademark Office files in that application for review of the above documents. See MPEP § 609. Additionally, the Examiner is requested to indicate that this information has been considered by initialing the appropriate portion of Form PTO-1449.

Applicants also direct the Examiner's attention to U.S. Applications Nos. 08/513,520, filed August 10, 1995, and 08/521,272, filed August 31, 1995, which were also cited in

parent Application No. 08/522,917. In accordance with 37 C.F.R. § 1.98(a)(2)(iii), no copies of these applications are enclosed, nor have the applications been listed on attached Form PTO-1449. The Examiner is respectfully directed to Patent and Trademark Office Files to review these applications. In this regard, Application No. 08/513,520 is now allowed and was examined in Group Art Unit 2838, and Application No. 08/521,272 is currently pending and is being examined in Group Art Unit 2853.

Inasmuch as the subject application has not yet received a first Office Action, it is believed that this Information Disclosure Statement is timely. See 37 C.F.R. § 1.97(b)(3). Accordingly, the Examiner is urged to study this information in its entirety and to form an independent determination of the materiality of the information to the claimed invention.

CONCLUSION

Applicant's undersigned attorney may be reached in our Costa Mesa, CA office by telephone at (714) 540-8700.

All correspondence should continue to be directed to our
below-listed address.

Respectfully submitted,


Attorney for Applicant

Registration No. 40,595

FITZPATRICK, CELLA, HARPER & SCINTO
30 Rockefeller Plaza
New York, New York 10112-3801
Facsimile: (212) 218-2200

CA_MAIN 11239 v 1

APPLICATION FOR UNITED STATES LETTERS PATENT

INVENTOR(S): Hiroshi YOSHINO

INVENTION: INK JET APPARATUS AND WASTE
LIQUID ABSORBING METHOD

S P E C I F I C A T I O N

BACKGROUND OF THE INVENTION

FIELD OF THE INVENTION

5 The present invention relates generally to an ink jet apparatus and a waste liquid absorbing method each of which assure that an image having a high quality can be obtained on a printing medium. More particularly, the present invention relates to an ink
10 jet apparatus for ejecting on the printing medium liquid having a function of undissolving a coloring material in ink prior to ejection of the ink.

 The present invention is applicable to all kinds of instruments for which a printing medium such as a
15 sheet of paper, unwoven fabric, a sheet of OHP film or the like is used. The applicable instrument is typically exemplified by an office machine and a mass production machine such as a printer, a copying machine, a facsimile or the like.

20 An ink jet printing method is utilized for a printer, a copying machine, a facsimile or the like for the reasons that a low level of noisy sound is generated, the ink jet method is practiced at a low running cost, an apparatus is easily designed with
25 small dimensions, and an image is easily formed by using colored inks.

However, the ink jet printing system has the following specific problems to be solved.

(1) Since a printing operation is performed by ejecting ink droplets from an ink jet head to a sheet of paper, a sheet of OHP film or a similar printing medium, fine ink mist other than the ejected main ink droplets or ink mist ejected to the printing medium rebounds to an ink jet head, causing the ink mist to adhere to an ink ejecting port surface until a large quantity of ink mist get together around the ink ejecting port. In addition, when paper powder or a similar foreign material adheres to the fine mist, ink ejection is obstructed, causing ink droplets to be ejected in an unexpected direction. In an extreme case, ink droplets can not be ejected.

(2) Unless the ink jet head is continuously ejected for a long time inclusive of non-printing time, ink in the nozzle is dried due to vaporization, resulting in the nozzle being clogged with ink having increased viscosity or solidified ink. Thus, there arises a malfunction that ink is ejected in the warped state or no ink ejection is effected.

The ink jet apparatus is generally equipped with recovering means as means for solving the problems as mentioned in the paragraph (1) and the paragraph (2). Specifically, when no printing operation is performed,

an ink jet head is capped with capping means for the purpose of preventing ink in a nozzle of the ink jet head from being vaporized and dried, resulting in the ink having increased viscosity or adherence to the nozzle. In the case that incorrect ejection is effected due to increased viscosity or adherence, foreign material which can not be removed by a blade adhere to the ink ejecting port surface, ink having increased viscosity in the nozzle is discharged by operating a suction pump connected to the cap so as to conduct recovering treatment for recovering normal ejection. Here, the discharged ink is sucked in a waste ink absorbing substance disposed in a housing of the apparatus via piping extending downstream of the suction pump.

A capacity of the waste ink absorbing substance is determined depending on the number of times of incorrect printings, the number of times of recovering operations, a quantity of ink squeezed or sucked every recovering operation or a quantity of ink mist discharged from the ink jet head, it is recommendable from the viewpoint of the whole structure of the apparatus that the waste ink absorbing substance is compactly designed to have a small capacity because it is expected that the position where it is disposed is not restricted, and moreover, it is fabricated at a

low cost. However, if a capacity of the waste ink absorbing substance is set to a quantity originally required by the apparatus, there arises an inconvenience of maintenance that the waste ink absorbing substance is periodically replaced with a new one. On the contrary, when a waste ink absorbing substance having a required capacity is disposed on the apparatus, the waste ink absorbing substance is relatively enlarged, causing it to be fabricated at an increased cost, and moreover, the housing of the apparatus is enlarged in size. In this connection, a technology for minimizing a volume of the waste ink absorbing substance by utilizing vaporization of ink is disclosed on an official gazette of Japanese Patent Application Laid-Open No. 22065/1982.

On the other hand, in the case that an image has insufficient water resistibility or a color image is formed on a printing medium that is called a plain paper with the aforementioned apparatus having an ink jet printing method applied thereto, a request for an image having a high density without an occurrence of feathering and a request for an image having no oozing of coloring substance among colors can not exist together, resulting in a quality of colored image being remarkably degraded.

In recent years, as a method of improving water

resistibility of an image, ink containing a coloring material having resistibility against water has been put in practical use. However, since this ink does not still have sufficient water resistibility, and it
5 is ink which is theoretically hardly dissolved in ink after drying, it has a drawback that ink is liable to cause a failure of ink ejection.

In view of the foregoing fact, a technology that transparent or translucent treatment liquid containing
10 a coloring substance which is insoluble in a solvent adheres to a printing medium with the aid of an ink jet head directly before a printing operation is disclosed in an official gazette of Japanese Patent Application Laid-Open No. 63185/1989. However, with
15 respect to this technology, the problem specific to the ink jet apparatus is applicable to a head for the treatment liquid, and when the treatment liquid is not ejected from the nozzle, there sometimes arises an occasion that water resistibility and a quality of
20 image corresponding to the failure of ejection of the treatment liquid are remarkably degraded. For this reason, it is necessary that the head for the treatment liquid is equipped with recovering means in the same manner as the ink jet head.

25 Fig. 9 schematically shows by way of example the structure of a conventional ink jet apparatus which is

equipped not only with recovering means for an ink jet head but also with recovering means for a head for treatment liquid. Here, each of a plurality of ink jet cartridges 1 includes an ink tank portion. A
5 plurality of ink jet cartridges 1 each containing treatment liquid for making coloring ink and coloring material for printing insoluble are mounted on a carriage at predetermined positions. The carriage 3 is slidably supported a shaft 4 extending in the main
10 scanning direction, and a driving belt 5 serves to transmit the driving force of the driving motor 6 for reciprocally displacing the carriage 3. A printing medium 11 is conveyed while its printing surface is flatly restricted by a platen 12. At this time, ink
15 jet head portions 2 of the ink jet cartridges 1 mounted on the carriage 3 is projected downward of the carriage 3 to assume a position between two sets of conveying rollers (not shown) of the printing medium 11, and ink ejecting port forming surfaces of the ink
20 jet head portions 2 faces to the printing medium 11 which is located in parallel thereto while comes in pressure contact with the guide surface of the platen 12. In addition, a recovering system unit 100 is arranged on the home position side located on the
25 right-hand side in Fig. 9. A plurality of cap units 101 are arranged in the recovering system unit 100

corresponding to the respective ink jet head portions 2 of a plurality of ink jet cartridges 101. The cap units 101 can be raised and lowered in the vertical direction. When the carriage 3 is located at the home position, it is connected to the ink jet head portions 2 so as to cap the latter wherewith to prevent an occurrence of incorrect ejection due to increased viscosity or chemical fixing induced by vaporization of ink in the ink ejection port. A pump unit (not shown) is disposed in the recovering system unit 100. This pump unit serves to generate negative pressure when suction recovering treatment is conducted by connecting the cap unit 101 to the ink jet head portions 2. As the suction recovering treatment is conducted, the ink and the treatment liquid sucked from the ink jet head is absorbed in a waste liquid absorbing substance 103 via a tube 102 by driving the pump unit.

When suction recovering treatment is conducted with the ink jet apparatus as mentioned above, two kinds of materials, i.e, the treatment liquid and ink are present in the waste liquid absorbed in the waste liquid absorbing substance 103. However, when these two kinds of waste liquids are mixed with each other, the mixture has a nature that viscosity is increased. Thus, there arise the following problems.

(1) When both liquids are absorbed in a single waste liquid absorbing substance for the purpose of saving a space, increased viscosity or setting is caused with the result that it becomes difficult to
5 absorb waste liquid in the whole waste liquid absorbing substance, and moreover, it is impossible to absorb the waste liquid at a high efficiency.

(2) When absorbing substances are provided separately for ink and treatment liquid so as to avoid
10 increased viscosity of the waste liquid, cost is increased and an apparatus is enlarged in size. In addition, a replacement frequency is twice increased when the absorbing substance is saturated with the waste liquid.

15

OBJECT OF THE INVENTION

An object of the present invention is to provide an ink jet apparatus which improves the drawbacks
20 inherent to the prior art and realizes an ink jet apparatus which includes a waste liquid absorbing substance in which waste liquid can effectively be held in the case that ink and waste liquid having setting/increased viscosity after completion of
25 reaction are absorbed in a single waste liquid absorbing body substance.

SUMMARY OF THE INVENTION

According to one aspect of the present invention,
5 there is provided an ink jet apparatus for pretreating
to a printing medium with treatment liquid having a
function of setting ink by using a first ink jet head,
and for printing on the printing medium with ink by
using a second ink jet head, wherein the apparatus
10 comprises first recovering means for recovering an
ejecting port of the first ink jet head, second
recovering means for recovering an ejecting port of
the second ink jet head, a waste liquid absorbing
substance for absorbing waste liquid discharged from
15 the first recovering means and the second recovering
means, first waste liquid transferring means for
transferring the waste liquid discharged from the
first recovering means the waste liquid absorbing
substance, and second waste liquid transferring means
20 for transferring the waste liquid discharged from the
second recovering means into the waste liquid
absorbing substance, wherein a discharge end of the
first waste liquid displacing means is located in
vicinity of one end of the waste liquid absorbing
25 substance, and a discharge end of the second waste
liquid displacing means is located in vicinity of

other end of the waste liquid absorbing substance.

It is acceptable that the waste liquid absorbing substance is formed in a U-shaped configuration, the discharge end of the first waste liquid displacing means is located in vicinity of one end of the U-shaped configuration, and the discharge end of the second waste liquid displacing means is located in the vicinity of other end of the U-shaped configuration of the waste liquid absorbing substance. It is also acceptable that the treatment liquid contains low molecular weight and high molecular weight cationic materials, while the ink contains an anionic dye or contains at least anionic compound and pigment. In addition, the ink jet head includes as an energy generating element an electrothermal transducer for generating thermal energy so as to allow a phenomenon of film boiling to appear in ink.

According to other aspect of the present invention, there is provided a waste liquid absorbing method for an apparatus for performing a printing operation by utilizing a treatment liquid having a function for setting ink as well as an ink, the apparatus including a waste liquid absorbing substance for absorbing the treatment liquid and the ink as waste liquid, wherein the treatment liquid and the ink are respectively absorbed in vicinity of the opposite

ends of the waste liquid absorbing substance.

It is acceptable that the waste ink absorbing substance is formed in the U-shaped configuration, and the treatment liquid and the ink are absorbed in
5 vicinity of the opposite ends of the waste liquid absorbing substance.

With the ink jet apparatus constructed in that way, since absorbing ends are separated in a single waste liquid absorbing substance so as not to allow
10 both the waste liquids to be mixed with each other without an occurrence of chemical fixing, it is possible to elevate an absorbing efficiency, and minimize a volume of the waste liquid absorbing substance, and moreover, construct the apparatus
15 compactly. Consequently, the apparatus can be constructed with smaller dimensions at a reduced cost. In addition, there is no need of replacing the waste liquid absorbing substance with another one or the number of times of replacing the waste liquid
20 absorbing substance with another one can be reduced.

The above and other objects, effects, features and advantages of the present invention will become more apparent from the following description of embodiments thereof taken in conjunction with the accompanying
25 drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a front view which schematically shows the structure of an ink jet apparatus constructed in accordance with a first embodiment of the present invention.

Fig. 2 is a side view of the ink jet apparatus shown in Fig. 1.

Fig. 3 is a schematic view which shows that a waste liquid absorbing substance of the first embodiment is not saturated.

Fig. 4 is a schematic view which shows that the waste liquid absorbing substance of the first embodiment is saturated with waste liquids.

Fig. 5 is a front view which schematically shows the structure of an ink jet apparatus constructed in accordance with a second embodiment of the present invention.

Fig. 6 is a plan view of the ink jet apparatus shown in Fig. 5.

Fig. 7 is a schematic view which shows that a waste liquid absorbing substance of the second embodiment is not saturated.

Fig. 8 is a schematic view which shows that the waste liquid absorbing substance of the second embodiment is saturated with waste liquids.

Fig. 9 is a front view which schematically show the structure of a conventional ink jet apparatus.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

5

The present invention will be described in detail hereinafter with reference to the accompanying drawings which illustrate two preferred embodiments thereof.

10 The present invention will be described below in detail with respect to two embodiments.

As shown in Fig. 1 which schematically shows by way of front view the structure of an ink jet apparatus constructed in accordance with a first
15 embodiment of the present invention and Fig. 2 which shows the side view of the ink jet apparatus, each of a plurality of ink cartridges 1 includes upper ink tank portions and lower ink jet head portions 2 and further includes a connector (not shown) which receive
20 a signal for driving an ink jet head. A carriage 3 carries a plurality of ink jet cartridges 1 in positions and includes a connector holder (not shown) for transmitting signals for driving an ink jet head and is electrically connected to the ink jet head. In
25 this embodiment, a plurality of cartridges containing yellow ink, magenta ink, cyan ink and black ink

respectively and a cartridge containing treatment liquid for making coloring material insoluble are mounted on the carriage 3 in order from the right to the left. The carriage 3 is slidably supported on a
5 guide shaft 4 extending in the main scanning direction, and a driving belt 5 serves to transmit the driving force of a driving motor 6 for reciprocally displace the driving belt 5. Pairs of conveying rollers 7, 8, 9 and 10 for conveying a printing medium
10 11 while the latter is clamped are arranged before and behind the printing position of the ink jet head. The printing medium 11 is conveyed while it is brought in pressure contact with a platen 12 for restricting the printing surface in the flattened state. At this
15 time, the ink jet head portions 2 of the ink jet cartridges 1 mounted on the carriage 3 are projected downward of the carriage 3 and are located between conveying rollers 7 and 9 for conveying the printing medium 11, and ink ejecting port forming surfaces of
20 the ink jet head portions 2 face to the printing medium 11 in the parallel state which is brought in pressure contact with the guide surface of the platen 12.

In the ink jet apparatus constructed in accordance
25 with this embodiment, a recovering system unit 13 is arranged on the home position side located on the

right-hand side as seen in Fig. 1. A plurality of cap units 14 are arranged corresponding to the ink jet head portions 2 of a plurality of ink jet cartridges 1, and the cap units 14 can be raised and lowered in vertical direction. When the carriage 3 is located at the home position, each of cap units 14 is connected to the ink jet head portions 2 in order to prevent an occurrence of incorrect ejection due to increased viscosity and evaporation of the ink in an ink ejecting port of the ink jet head.

In addition, a pump unit (not shown) is disposed in the recovering system unit 13. When the ink jet head performs incorrect ejection, this pump unit induces negative pressure at the time of suction recovering treatment performed while the cap units 14 are connected to the ink jet head portions 2. During such suction recovering treatment, the ink sucked in the ink jet head is absorbed in a waste liquid absorbing substance 16 via a tube 15 which serves as waste liquid conveying means from the pump unit. In this embodiment, the cap for capping the treatment liquid head arranged at the left end of the recovering system unit 13 does not connect to the pump unit.

On the other hand, in this embodiment, a treatment liquid recovering unit 17 exclusively for the cartridge having the treatment liquid received therein

is disposed on the left-hand side as seen in Fig. 1 so that suction recovering treatment can be performed when the treatment liquid ejection head can not correctly eject. A pump unit (not shown) is disposed
5 also in the treatment liquid recovering system unit 17 in the same manner as the recovering system unit 13 so as to conduct suction recovering treatment in the case that the treatment liquid head does not correctly eject. The treatment liquid discharged from the
10 treatment liquid ejection head by such recovering treatment is absorbed in the waste liquid absorbing substance 16 via a tube 18 serving as waste liquid conveying means. The reason why the treatment liquid recovering system unit 17 is separated from the
15 recovering system unit 13 is to avoid an occurrence of incorrect suction due to increased viscosity induced by mixing the ink and treatment liquid with each other in the pump.

As described above, in this embodiment, the
20 discharge ends of the discharge tubes 15 and 18 for discharging waste liquids from the recovering units 13 and 17 are disposed on the opposite ends of the waste liquid absorbing substance 16 which linearly extends in the leftward/rightward direction as seen in the
25 drawings. A manner that the waste liquid is absorbed in the waste liquid absorbing substance will be

described as follows.

Fig. 3 and Fig. 4 show a manner that the waste liquid is absorbed in the waste liquid absorbing substance 16 in accordance with this embodiment.

5 Especially, Fig. 3 shows that the waste liquid absorbing substance 16 has still allowance in capacity and Fig. 4 shows that the waste liquid absorbing substance 16 is substantially saturated with waste liquids.

10 In the state as shown in Fig. 3, ink waste liquid 21 and treatment liquid waste liquid 22 absorbed in the waste liquid absorbing substance 16 through the tubes 15 and 18 are separately stored in the opposite end ranges of the waste liquid absorbing substance 16.
15 For this reason, it can be considered that two kinds of waste liquids are absorbed in separate waste liquid absorbing substances. In this case, since the two waste liquids do not interfere with each other, there is no danger that a malfunction of increased viscosity
20 or setting occurs. Thus, waste liquid is absorbed in the waste liquid absorbing substance 16 without any obstruction.

On the other hand, in the state shown in Fig. 4, the waste liquid absorbing substance 16 is
25 substantially saturated with two kinds of waste liquids 21 and 22, and a jelly-like reaction product

23 is formed at the substantial central part of the waste liquid absorbing substance 16. However, since the waste liquid absorbing substance 16 is substantially saturated with the waste liquids, the
5 jelly-like reaction product 23 does not become obstruction for the waste liquid absorption.

A balance between a quantity of waste liquid of treatment liquid and a quantity of waste liquid of ink varies due to various factors such as humidity,
10 temperature, printing frequency or the like, and since the position where both liquids mix with each other is automatically regulated even when the foregoing balance is largely deviated from the neutral state, absorption can be achieved with the use of the whole
15 volume of the waste liquid absorbing substance 16. Thus, the volume of the waste liquid absorbing substance 16 can be minimized, resulting in a fabrication cost being reduced. In addition, since the waste liquid absorbing efficiency is increased,
20 there is no need of exchanging the waste liquid absorbing substance 16 with another one or there is few frequency of exchanging it with another one.

Since the ink jet apparatus having the treatment liquids used therefor is constructed in the above-
25 described manner, the volume of the waste liquid absorbing substance 16 can effectively be utilized

with simple structure and at a low cost, whereby a high quality of image can be obtained without any undesirable increased cost.

In this embodiment, the waste liquid absorbing substance 16 extends by a long stance in the horizontal direction and the waste liquids are absorbed at the opposite ends of the waste liquid absorbing substance 16. Otherwise, the waste liquid absorbing substance 16 may extend by a long distance in the vertical direction so that the waste liquids are absorbed at upper and lower ends of the waste liquid absorbing substance 16. Alternatively, the waste liquid absorbing substrate may be designed in a cubic configuration so that the waste liquids are absorbed at the opposite diametrical ends of the waste ink absorbing substance 16.

Here, as an example, the colorless treatment liquid for making ink dyestuff insoluble can be obtained in the following manner.

Specifically, after the following components are mixed together and dissolved, and the mixture is pressure-filtered by using a membrane filter of 0.22 μm in pore size (tradename: fuloropore filter manufactured by Sumitomo Denki Kogyo K. K.), and thereafter, pH of the mixture is adjusted to a level of 4.8 by adding sodium hydroxide whereby colorless

```
[components of A1]
```

5	stearyl-trimethyl ammonium chloride (tradename : Electrostopper QE, manufactured by Kao Co.)	2.0 %
---	--	-------

10 polyaminesulfon (having an average molecular
weight of 5000)

thiodiglycol	1.0 %
--------------	-------

Preferable examples of ink which becomes insoluble
mixing the aforementioned colorless liquid can be
found below.

- 20 -

Y1

	C. I. direct yellow 142	2 %
	thiodiglycol	10 %
	acetytol EH (manufactured by Kawaken	
5	Finechemical Co.)	0.05 %
	water	balance

M1

having the same composition as that of Y1 other
than that the dyestuff is changed to 2.5% of C. I.
10 acid red 289.

C1

having the same composition as that of Y1 other
15 than that the dyestuff is changed to 2.5% of acid blue
9.

K1

having the same composition as that of Y1 other
than that the dyestuff is changed to 3% of C. I. food
20 black 2.

According to the present invention, the
aforementioned colorless liquid and ink are mixed with
each other at the position on the printing medium or
at the position where they penetrate in the printing
25 medium. As a result, the ingredient having a low
molecular weight among the cationic material contained

in the colorless liquid and the water soluble dye used
in the ink having anionic radical are associated with
each other by an ionic mutual function as a first
stage of reaction whereby they are instantaneously
5 separated from the solution liquid phase.

Next, since the associated material of the
dyestuff and the cationic material having a low
molecular weight are adsorbed by the ingredient having
a high molecular weight and contained in the colorless
10 liquid as a second stage of reaction, a size of the
aggregated material of the dyestuff caused by the
association is further increased, causing the
aggregated material to hardly enter fibers of the
printed material. As a result, only the liquid
15 portion separated from the solid portion permeates
into the printed paper, whereby both high print
quality and a quick fixing property are obtained. At
the same time, the aggregated material formed by the
ingredient having a low molecular weight of the
20 cationic material caused by way of the aforementioned
mechanism, the anionic dye and the cationic material
has increased viscosity. Thus, since the aggregated
material does not move as the liquid medium moves, ink
dots adjacent to each other are formed by inks each
25 having a different color like at the time of forming a
full colored image but they are not mixed with each

other. Consequently, a malfunction such as bleeding does not occur. Furthermore, since the aggregated material is substantially water-insoluble, water resistibility of a formed image is complete. In addition, light resistibility of the formed image can be improved by the shielding effect of polymer.

When the present invention is carried out, since there is no need of using the cationic material having a high molecular weight and polyvalent metallic salts like the prior art or even though there is need of using them, it is sufficient that they are assistantly used to improve an effect of the present invention, a quantity of usage of them can be minimized. As a result, the fact that there is no reduction of a property of color exhibition that is a problem in the case that an effect of water resistibility is asked for by using the conventional cationic high molecular weight material and the polyvalent metallic salts can be noted as another effect of the present invention.

With respect to a printing medium usable for carrying out the present invention, there is no specific restriction, so called plain paper such as copying paper, bond paper or the like conventionally used can preferably be used. Of course, coated paper specially prepared for ink jet printing and OHP transparent film are preferably used. In addition,

ordinary high quality paper and bright coated paper can preferably be used.

Ink usable for carrying out the present invention should not be limited only to dyestuff ink, and
5 pigment ink having pigment dispersed therein can also be used. Any type of treatment liquid can be used, provided that pigment is aggregated with it. The following pigment ink can be noted as an example of pigment ink adapted to cause aggregation by mixing
10 with the colorless liquid A1. As mentioned below, yellow ink Y2, magenta ink M2, cyan ink C2 and black ink K2 each containing pigment and anionic compound can be obtained.

[Black ink K2]

15 The following materials are poured in a batch type vertical sand mill (manufactured by Aimex Co.), glass beads each having a diameter of 1 mm is filled as media using anion based high molecular weight material P-1 (aqueous solution containing a solid ingredient of
20 styrene methacrylic acid ethylacrylate of 20 % having an acid value of 400 and average molecular weight of 6000, neutralizing agent : potassium hydroxide) as dispersing agent to conduct dispersion treatment for 3 hours while water cooling the sand mill. After
25 completion of dispersion, the resultant mixture has a viscosity of 9 cps and pH of 10.0. The dispersing

liquid is poured in a centrifugal separator to remove coarse particles, and carbon black dispersing element having an average grain size is 10 nm is produced.

(Composition of carbon black dispersing element)

- | | | |
|----|---|-----------|
| 5 | • P-1 aqueous solution (solid ingredient of 20 %) | 40 parts |
| | • carbon black (Mogul L; manufactured by Cablack Co.) | 24 parts |
| | • glycerol | 15 parts |
| 10 | • ethylene glycol monobutyl ether | 0.5 parts |
| | • isopropyl alcohol | 3 parts |
| | • water | 135 parts |

- Next, the thus obtained dispersing element is
- 15 sufficiently dispersed in water, and black ink K2 containing pigment for ink jet printing is obtained. The final product has a solid ingredient of about 10 %.

[Yellow ink Y2]

- 20 Anionic high molecular P-2 (aqueous solution containing a solid ingredient of 20 % of stylen acrylic acid methyl methacrylate having an acid value of 280 and an average molecular weight of 11,000, neutralizing agent : diethanolamine) is used
- 25 as a dispersing agent and dispersive treatment is conducted in the same manner as production of the

black ink K2 whereby yellow color dispersing element having an average granular diameter 103 nm is produced.

(composition of yellow dispersant)

- | | | |
|----|--|-----------|
| 5 | • P-2 aqueous solution (having a solid ingredient of 20 %) | 35 parts |
| | • C. I. pigment yellow 180 | |
| | (tradename : Nobapalm yellow-PH-G, manufactured by Hext Co.) | 24 parts |
| 10 | • triethylen glycol | 10 parts |
| | • diethylen glycol | 10 parts |
| | • ethylene glycol monobutylether | 1.0 parts |
| | • isopropyl alcohol | 0.5 parts |
| | • water | 135 parts |

- 15 The thus obtained yellow dispersing element is sufficiently dispersed in water to obtain yellow ink Y2 for ink jet printing and having pigment contained therein. The final product of ink contains a solid ingredient of about 10 %.

- 20 [Cyan ink C2]

- Cyan colored-dispersant element having an average grain size of 120 nm is produced using anionic high molecular P-1 as dispersing agent, and moreover, using the following materials by conducting dispersing treatment in the same manner as the carbon black dispersing element.
- 25

(composition of cyan colored-dispersing element)

• P-1 aqueous solution (having solid ingredient of
20 %) 30 parts

• C. I. pigment blue 15 : 3

5 (trade name : Fastogen blue FGF, manufactured by
Dainippon Ink Kagaku Kogyo Co.) 24 parts

• glycerol 15 parts

• diethylenglycol monobutylether 0.5 parts

• isopropyl alcohol 3 parts

10 • water 135 parts

The thus obtained cyan colored dispersing element
is sufficiently stirred to obtain cyan ink C2 for ink
jet printing and having pigment contained therein.

15 The final product of ink has a solid ingredient of
about 9.6 %.

[Magenta ink M2]

Magenta color dispersing element having an average
grain size of 115 nm is produced by using the anionic
20 high molecular P-1 used when producing the black ink
K2 as dispersing agent, and moreover, using the
following materials in the same manner as that in the
case of the carbon black dispersing agent.

(composition of the magenta colored dispersing
25 element)

• P-1 aqueous solution (having a solid ingredient

of 20 %)	20 parts
· C. I. pigment red 122 (manufactured by Dainippon Ink Kagaku Kogyo Co.)	24 parts
· glycerol	15 parts
5 · isopropyl alcohol	3 parts
· water	135 parts

10 Magenta ink M2 for ink jet printing and having pigment contained therein is obtained by sufficiently dispersing the magenta colored dispersing element in water. The final product of ink has a solid ingredient of about 9.2 %.

15 Next, description will be made below with respect to an ink jet apparatus constructed in accordance with a second embodiment of the present invention.

20 As shown in Fig. 5 which schematically shows the front contour of the ink jet apparatus constructed in accordance with the second embodiment of the present invention and Fig. 6 which schematically shows the contour of the ink jet apparatus as seen from the above, a carriage having a plurality of ink jet cartridges mounted thereon and associated components, an ink jet head and a conveying system are same as those in the first embodiment of the present invention. Thus, same components are represented by

same reference numerals, and description on these components will be herein omitted for the purpose of simplification. Incidentally, the carriage and associated components and the paper conveyance system are not shown in Fig. 6 that is a plan view of the ink jet printing apparatus.

In this embodiment, a recovering unit 13 is disposed on the home position side located at a predetermined right-hand position as shown in Fig. 5.

10 In the recovering unit 13, a plurality of cap units 14 are disposed corresponding to respective ink jet head portions 2 of a plurality of ink jet cartridges 1, and the cap units 14 can be raised and lowered in the vertical direction. The cap head units 14 are

15 connected to ink jet head portions 2 to cap the latter therewith when the carriage 3 is situated at a home position, in order to prevent an occurrence of incorrect ejection due to increased viscosity of ink and setting induced by vaporization of the ink in ink

20 ejection ports.

The recovering unit 13 is equipped with a pump unit (not shown). This pump unit serves to generate negative pressure for suction recovering treatment to be conducted while the cap units 14 are connected to

25 the ink jet head portions 2 in the case that the ink jet head portions 2 become to incorrectly eject ink.

During suction recovering treatment, ink from the ink jet head is absorbed in a waste liquid absorbing substance 16A from the pump unit via a tube 15.

On the other hand, in this embodiment, a treatment liquid recovering system unit 17 disposed exclusively for a cartridge having treatment liquid received therein is arranged between the recovering system unit 13 and the waste liquid absorbing substance 16A. The treatment liquid recovering system unit 17 is equipped with a pump unit (not shown) like the recovering system unit 13 so as to conduct suction recovering treatment in the case that a treatment liquid ejecting head becomes to incorrectly eject treatment liquid. By conducting the recovering treatment, the treatment liquid ejected from the head is absorbed in the waste liquid absorbing substance 16A via a tube 18. The reason why the treatment liquid recovering system unit 17 is arranged separate from the recovering system unit 13 is to avoid an occurrence of incorrect suction of the pump unit due to increased viscosity induced by mixing ink with the treatment liquid in the pump.

A characterizing feature of this embodiment consists in arrangement of the waste liquid absorbing substance 16A in a U-shaped configuration as shown in Fig. 6 that is a plan view of the ink jet apparatus. The opposite ends of the U-shaped waste liquid

absorbing substance 16A are located on the right-hand side as seen in the drawing, and a discharge end of the ink tube 15 is inserted in one end of the U-shaped waste liquid absorbing substance 16A while a discharge end of a treatment liquid tube 18 is inserted into other end of the same. A boundary rib member 19 is fitted into an inner hollow portion of the U-shaped configuration of the waste liquid absorbing substance 16A so that ink absorbed in one end do not permeate to the other end across the rib member 19.

Next, a manner of permeation into the waste liquid absorbing substance 16A in accordance with this second embodiment will be described below.

Fig. 7 and Fig. 8 show how the waste liquid is absorbed in the waste liquid absorbing substance 16A. Particularly, Fig. 7 shows the state that the waste liquid absorbing substance 16A has some allowance in capacity, and Fig. 8 shows that the waste liquid absorbing substance 16A is substantially saturated with the waste liquids.

In the state as shown in Fig. 7, ink waste liquid 21 and treatment waste liquid 22 absorbed in the waste liquid absorbing substance 16A past the tubes 15 and 18 are separately stored at the opposite ends of the U-shaped waste liquid absorbing substances 16A. Thus, it can be considered that two kinds of waste liquids

are absorbed in separate waste liquid absorbing substances. Since two waste liquids do not interfere with each other, there does not arise a malfunction associated with increased viscosity or setting.

- 5 Consequently, there is not a factor of obstructing absorption of the waste liquid.

On the other hand, in the state shown in Fig. 8, the waste liquid substance 16A is substantially saturated with two kinds of waste liquids, and a
10 jelly-like reaction product 23 formed by reaction of the two waste liquids is located at the central part of the U-shaped configuration of the waste liquid absorbing substance 16A. Since the waste liquid absorbing substance 16A is already saturated, the
15 jelly-like reaction product 23 does not obstruct absorption of the waste liquids.

A balance between a quantity of waste treatment liquid and a quantity of waste ink varies depending on various factors such as humidity, temperature,
20 frequency of printing operations. However, since the position where both liquids mix with each other is automatically adjusted even when the balance between the waste ink and the waste liquid is largely deviated from the neutral state, both the waste liquids can be
25 absorbed in the whole volume of the waste liquid absorbing substance 16A. Thus, the volume of the

waste liquid absorbing substance 16A can be minimized, resulting in the cost of the apparatus being reduced.

In addition, since the absorbing efficiency of the waste liquids is increased, there is no need of

- 5 replacing the waste liquid absorbing substance 16A with another one or a frequency of replacing the waste liquid absorbing substance 16A with another one is few.

- 10 Additionally, in this embodiment, it is possible to accommodate two pumps for ink and pretreatment liquid in a single recovering unit, it is possible to fabricate the apparatus at a reduced cost, and moreover, it is possible to design the apparatus with smaller dimensions as seen in the direction of a
- 15 width. The gap of the U-shaped portion of the waste liquid absorbing substance 16A can easily be formed by press molding. Since a rib member 19 can easily be disposed for an outer case serving also as an accommodating case for the waste liquid absorbing
- 20 substance 16A by employing an integral molding process, there is not substantially any factor for producing the apparatus at an increased cost.

- As mentioned above, in this embodiment, in addition to an advantages as mentioned with respect to
- 25 the first embodiment, the apparatus can be designed with smaller dimensions, and moreover, the apparatus

can be produced at more reduced cost.

- In this embodiment, the waste liquid absorbing substance 16A having a U-shaped configuration is formed in the horizontal direction. Alternatively,
- 5 the U-shaped configuration of the waste liquid absorbing substance 16A may be formed in the vertical direction so that the waste liquids are absorbed in the waste liquid absorbing substance 16A from the opposite ends of the U-shaped configuration.
- 10 The present invention has been described in detail with respect to preferred embodiments, and it will be now be that changes and modifications may be made without departing from the invention in its broader aspects, and it is the intention, therefore, in the
- 15 appended claims to cover all such changes and modifications as fall within the true spirit of the invention.

WHAT IS CLAIMED IS:

1, An ink jet apparatus for pretreating to a printing medium with treatment liquid having a function of
5 setting ink by using a first ink jet head, and for printing on said printing medium with ink by using a second ink jet head, comprising;

first recovering means for recovering an ejecting port of said first ink jet head, second recovering
10 means for recovering an ejecting port of said second ink jet head, a waste liquid absorbing substance for absorbing waste liquid discharged from said first recovering means and said second recovering means,
first waste liquid transferring means for transferring
15 the waste liquid discharged from said first recovering means into said waste liquid absorbing substance, and second waste liquid transferring means for transferring the waste liquid discharged from said second recovering means into said waste liquid
20 absorbing substance,

wherein a discharge end of said first waste liquid displacing means is located in vicinity of one end of said waste liquid absorbing substance, and a discharge end of said second waste liquid displacing means is
25 located in vicinity of other end of said waste liquid absorbing substance.

2. An ink jet apparatus as claimed in claim 1,
wherein said waste liquid absorbing substance is
formed in a U-shaped configuration, the discharge end
5 of said first waste liquid displacing means is located
in vicinity of one end of the U-shaped configuration
of said waste liquid absorbing substance, and the
discharge end of said second waste liquid displacing
means is located in vicinity of other end of the U-
10 shaped configuration of said waste liquid absorbing
substance.

3. An ink jet apparatus as claimed in claim 1 or
claim 2, wherein said treatment liquid contains a
15 cationic material composed of a low molecular weight
ingredient and a high molecular weight ingredient, and
said ink contains an anionic dye.

4. An ink jet apparatus as claimed in claim 1 or
20 claim 2, wherein said treatment liquid contains a
cationic material composed of a low molecular weight
ingredient and a high molecular weight ingredient, and
said ink contains an anionic dye or at least an
anionic compound and a pigment.

25

5. An ink jet apparatus as claimed in any one of

claim 1 to claim 4, wherein said ink jet head includes as an energy generating element an eletrothermal transducer for generating thermal energy so as to allow a phenomenon of film boiling to appear in ink.

5

6. A waste liquid absorbing method for an apparatus for performing a printing operation by utilizing treatment liquid having a function of setting ink as well as ink, said apparatus including a waste liquid
10 absorbing substance for absorbing said treatment liquid and said ink as waste liquid, wherein said treatment liquid and said ink are respectively absorbed in vicinity of opposite ends of said waste liquid absorbing substance.

15

7. A waste liquid absorbing method as claimed in claim 6, wherein said waste liquid absorbing substance is formed in the U-shaped configuration, and said treatment liquid and said ink are absorbed in vicinity
20 of the opposite ends of said waste liquid absorbing substance.

1272.7623

ABSTRACT OF THE DISCLOSURE

An ink jet apparatus includes first recovering means for recovering an ejecting port of a first ink
5 jet head, second recovering means for recovering an ejecting port of a second ink jet head, a waste liquid absorbing substance for absorbing waste liquid discharged from the first recovering means and the second recovering means, first waste liquid
10 transferring means for transferring the waste liquid discharged from the first recovering means into the waste liquid absorbing substance, and second waste liquid transferring means for transferring the waste liquid discharged from the second recovering means
15 into the waste liquid absorbing substance, wherein a discharge end of the first waste liquid displacing means is located in vicinity of one end of the waste liquid absorbing substance, and a discharge end of the second waste liquid displacing means is located in
20 vicinity of other end of the waste liquid absorbing substance. Thus, even in the case that ink and waste liquid having chemical fixing/increased viscosity after completion of a reaction are absorbed in a single waste liquid absorbing substance, the latter
25 can effectively hold the waste ink.

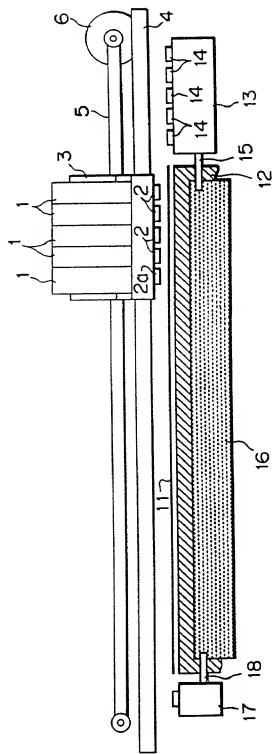


FIG. 1




FIG. 2




FIG. 3




FIG. 4

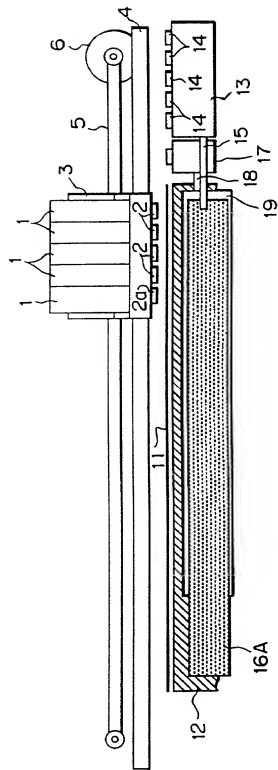


FIG. 5

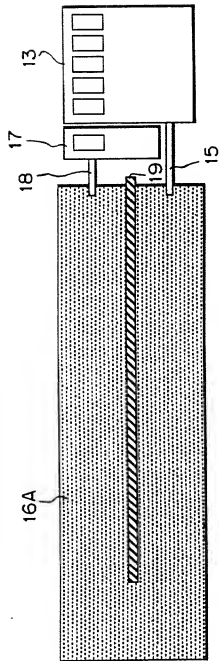


FIG. 6

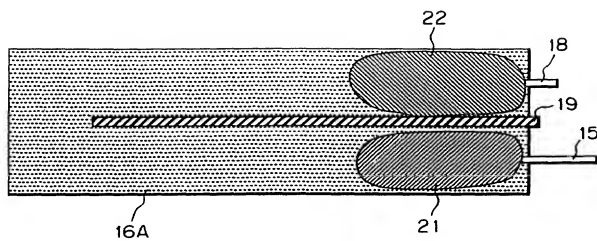


FIG.7

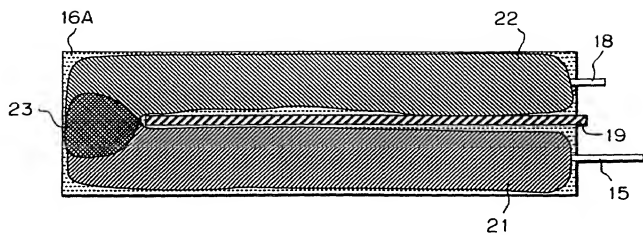


FIG.8

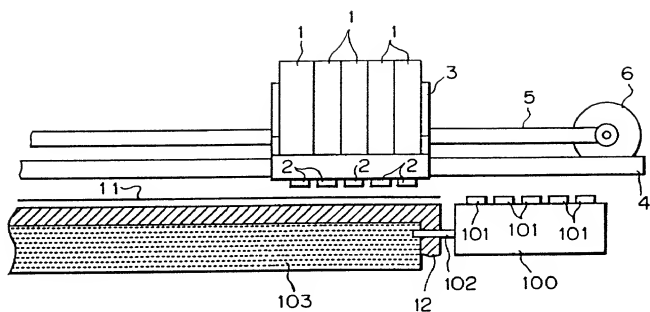


FIG. 9
(PRIOR ART)

COMBINED DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

(Page 1)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled INK JET APPARATUS AND WASTE LIQUID ABSORBING METHOD

the specification of which () is attached hereto (X) was filed on September 1, 1995 as United States Application No. or PCT International Application No. 08/522,917 and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or §365(b), of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT international application which designates at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed:

Country	Application No.	Filed(Day/Mo./Yr.)	Priority Claimed (Yes/No)
Japan	210218/1994	02/09/1994	Yes

I hereby appoint the following attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith: Joseph M. Fitzpatrick (Registration No. 17,398), Lawrence F. Scinto (Registration No. 18,973), William J. Brunet (Registration No. 20,452), Robert L. Baechold (Registration No. 20,860), John A. O'Brien (Registration No. 24,367), John A. Krause (Registration No. 24,613), Henry J. Renk (Registration No. 25,499), Peter Saxon (Registration No. 24,947), Anthony M. Zupic (Registration No. 27,276), Charles P. Baker (Registration No. 26,702), Steven J. Boeses (Registration No. 22,291), Edward E. Vassallo (Registration No. 29,117), Ronald A. Clayton (Registration No. 26,718), Lawrence A. Suhl (Registration No. 30,110), Laura A. Bauer (Registration No. 29,767), Leonard P. Diana (Registration No. 29,296), David M. Quinlan (Registration No. 26,641), Nicholas N. Kallas (Registration No. 31,530), William M. Wannisky (Registration No. 28,373), Lawrence S. Perry (Registration No. 31,865), Robert H. Fischer (Registration No. 30,051), Christopher Philip Wrist (Registration No. 32,078), Gary M. Jacobs (Registration No. 28,861), Michael K. O'Neill (Registration No. 32,622), Bruce C. Haas (Registration No. 32,734), Scott K. Reed (Registration No. 32,433), Scott D. Malpede (Registration No. 32,533), Fredrick M. Zullow (Registration No. 32,452), Richard P. Bauer (Registration No. 31,588), Warren E. Olsen (Registration No. 27,290), Abigail F. Cousins (Registration No. 29,292), Steven E. Warner (Registration No. 33,326), Thomas J. O'Connell (Registration No. 33,202), Penina Wollman (Registration No. 30,816), David L. Schaeffer (Registration No. 32,716), Jack S. Cubert (Registration No. 24,245), Mark A. Williamson (Registration No. 33,628), Jean K. Dudek (Registration No. 30,938), Raymond R. Mandra (Registration No. 34,382), Dominick A. Conde (Registration No. 33,856), Pasquale A. Razzano (Reg. No. 25,512), John W. Behringer (Registration No. 23,086), Robert C. Kline (Registration No. 17,739), Mark J. Itri (Registration No. 36,171), William C. Hwang (Registration No. 36,169), Michael P. Sandonato (Registration No. 35,345), Jack M. Arnold (Registration No. 25,823), John D. Carlia (Registration No. 37,292), Daniel S. Glueck (Registration No. 37,838), Victor J. Geraci (Registration No. 38,157), Joseph W. Ragusa (Registration No. 38,586), Brian L. Klock (Registration No. 36,570), Anne M. Maher (Registration No. 38,231), William J. Zak, Jr. (Registration No. 38,668), Thomas D. Pease (Registration No. 35,317), Bruce M. Weiler (Registration No. 35,409), Robert S. Mayer (Registration No. 38,544), Errol B. Taylor (Registration No. 39,853), Matthew J. Golden (Registration No. 35,161), Mark J. Rosen (Registration No. 39,822), Sean W. O'Brien (Registration No. 37,689), Thomas M. Palisi (Registration No. 36,629), Dolores A. Morogrossman (Registration No. 33,972), T. Thomas Gellenthien (Registration No. 39,683), Douglas Sharrott (Registration No. 39,832), Gordon F. Sieckmann (Registration No. 28,667), and Jay H. Anderson (Registration No. 38,371).

Address all correspondence to:

FITZPATRICK, CELLA, HARPER & SCINTO
277 Park Avenue
New York, N.Y. 10172

COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION
(Page 2)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor Hiroshi YOSHINO

Inventor's signature Hiroshi Yoshino

Date January 16, 1997 Citizen/Subject of JAPAN

Residence 5-8-1, Rokkakubashi, Kanagawa-ku, Yokohama-shi,
Kanagawa, Japan

Post Office Address c/o Canon Kabushiki Kaisha, 3-30-2, Shimomaruko,
Ohta-ku, Tokyo, Japan